




Our Deck Toggle System is used for cables that need to be face mounted or where an angled takeoff is required. Attachment is by two screw holes in the deck toggle base. Please note that the assembly strength is based on the attachment screws and the attachment material. Components can be mixed and matched with other systems for versatility. (316 grade stainless steel for superior corrosion resistance.)

### Usage

Deck toggles are excellent for attaching to wood posts or blocking (requires minimum 3" wood blocking). These toggles can be used with any post configuration and are excellent for angled cable runs. Deck toggle fittings articulate more than 90 degrees. Deck toggles can be attached to either side of a common post by through bolting or if wall thickness of post is thick enough you can drill and tap posts to accept deck toggle fittings.

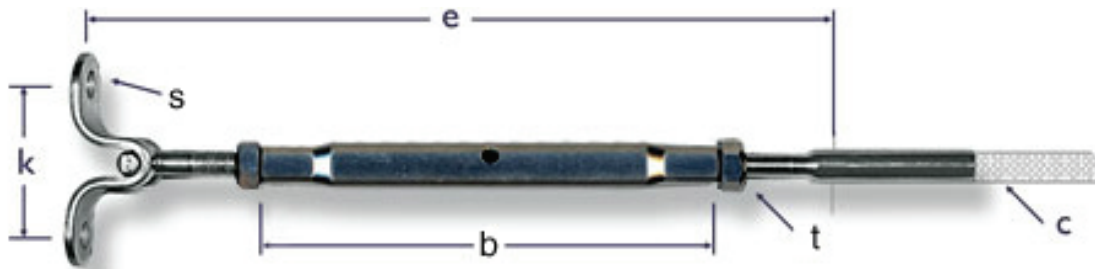

**Handy Crimp Deck Toggle Turnbuckles**

| Cable Size (c) | Thread (t) | Body L (b) | Open L (e) | Closed L (e) | Screw Size (s) | Hole Spacing (k) | Part #   |
|----------------|------------|------------|------------|--------------|----------------|------------------|----------|
| 1/8"           | 1/4-28     | 4-1/4"     | 9"         | 6"           | 1/4"           | 1-1/2"           | 10A40412 |
| 3/16"          | 1/4-28     | 4-1/4"     | 9-1/8"     | 6-1/4"       | 1/4"           | 1-1/2"           | 10A60412 |



**Handy Crimp Deck Toggles**


| Cable Size (c) | Screw Size (s) | Hole Spacing (k) | Part #   |
|----------------|----------------|------------------|----------|
| 1/8"           | 1/4"           | 1-1/2"           | 10F40412 |
| 3/16"          | 1/4"           | 1-1/2"           | 10F60412 |

# Handy Crimp Deck Toggle System

## Post Hole Requirements

Your holes should be drilled to these diameters to allow clearance for our hardware.

| Post Hole Requirements |                                |
|------------------------|--------------------------------|
| Cable Size             | Drill Hole to a Diameter of... |
| 1/8"                   | 1/4"                           |
| 3/16"                  | 3/8"                           |

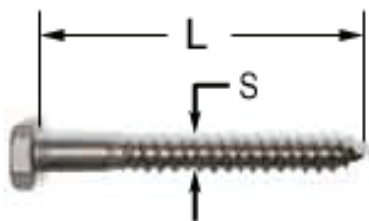

| Lag Screws     |            |          |
|----------------|------------|----------|
| Screw Size (s) | Length (L) | Part #   |
| 1/4"           | 1-1/2"     | 10HB0801 |
| 1/4"           | 2-1/2"     | 10HB0803 |
| 5/16"          | 1-1/2"     | 10HB1001 |
| 5/16"          | 2-1/2"     | 10HB1003 |
| 3/8"           | 1-1/2"     | 10HB1201 |
| 3/8"           | 2-1/2"     | 10HB1203 |