




Our Toggle Jaw System features fork style ends for attachment to plates, eyebolts, welded loops, ect. The toggling feature allows for angled takeoff. Toggles come supplied with cotter pins and ring pins, or screw and lock nuts. Toggle jaws may also be combined with any other system. (316 grade stainless steel for superior corrosion resistance).

## Usage

Toggle Jaws are clevis style attachments allowing attachment to a variety of post styles: tee-stode, angle iron, flat bar welded to post, loops attached to post, eyebolts, ect. They are excellent for any kind of applications from cable rails to hanging signs or shelving, even structural applications such as canopy supports, collar tie cables, or fabric structures.

Attachment size corresponds to width of clevis, ex. 1/4" pin = 1/4" opening.

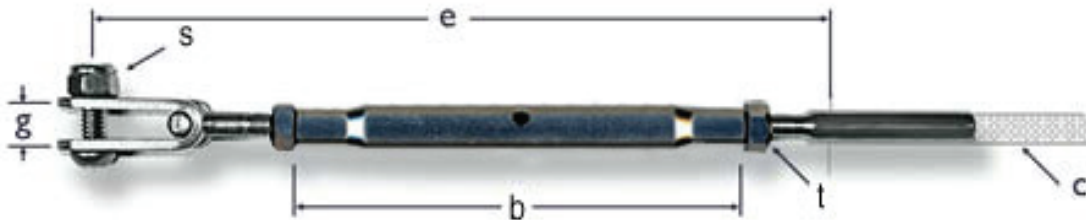

Toggle Jaw Turnbuckle							
Cable Size (c)	Thread (t)	Body L (b)	Open L (e)	Closed L (e)	Jaw Width (g)	Screw Size (s)	Part #
1/8"	10-32	3-1/2"	7-5/8"	5-1/4"	1/4"	1/4"	10A40200
1/8"	1/4-28	4-1/4"	9"	6-5/8"	1/4"	1/4"	10A40202
5/32"	1/4-28	4-1/4"	9-1/8"	6-5/8"	1/4"	1/4"	10A50202
3/16"	1/4-28	4-1/4"	9-3/8"	6-5/8"	1/4"	1/4"	10A60202
3/16"	5/16-24	4-3/4"	10-1/4"	7-1/2"	5/16"	5/16"	10A60204
1/4"	5/16-24	4-3/4"	10-1/2"	7-5/8"	5/16"	5/16"	10A80202
1/4"	3/8-24	5-1/4"	11-3/8"	8-1/4"	3/8"	3/8"	10A80204

# Toggle Jaw System



Toggle Jaws			
Cable Size (c)	Jaw Width (g)	Screw Size (s)	Part #
1/8"	1/4"	1/4"	10F40200
1/8"	1/4"	1/4"	10F40202
5/32"	1/4"	1/4"	10F50202
3/16"	1/4"	1/4"	10F60202
3/16"	5/16"	5/16"	10F60204
1/4"	5/16"	5/16"	10F80202
1/4"	3/8"	3/8"	10F80204

## Post Hole Requirements

Your holes should be drilled to these diameters to allow clearance for our hardware.

Post Hole Requirements	
Cable Size	Drill Hole to a Diameter of...
1/8"	1/4"
5/32"	9/32"
3/16"	11/32"
1/4"	15/32"